



HSS-120 306 230 A 2202

in product series HSS-120

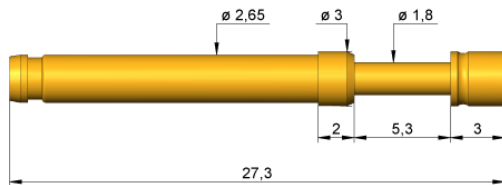

Tip style



General data

Order designation	HSS-120 306 230 A 2202
Variant number	HSS-120-0036
Sub product group	Standard high current test probes (press-in)
Series	HSS-120
Type of installation	plug-in
Quick-exchange system	yes
Installation height adjustable	no
Non-rotating	no
Magnetic	yes

Mechanical data

Grid	4 mm
Total length	27.3 mm
Collar height	02
Probe barrel diameter	2.65 mm
Installation height without receptacle	10.3 mm
Working stroke	4 mm
Max. stroke	5.3 mm
Spring pre-load	0.67 N
Spring force at working stroke	2.25 N

Electrical data

Current load capacity / rated current	30 A
Resistance (Ri typical)	10 mOhm

Plunger head data

Tip style	06 serrated
Tip style diameter	2,30 mm
Tip style material	3 BeCu
Tip style surface	A Gold

Operating temperature range

Temperature min.	-100 °C
Temperature max.	200 °C