
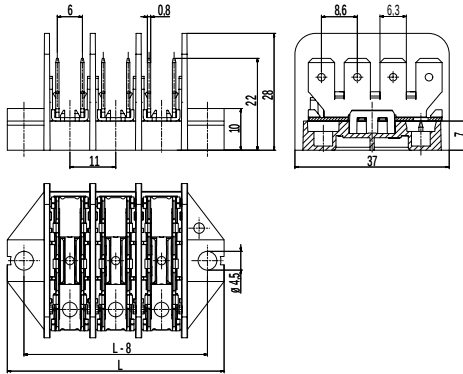


308-PA/..-302

Distributor strip

Tab connections 8 x 6,3; vertical



Part Numbers

No. of poles	308-PA/..-302	Length	PU
1	11.885.302	30	250
2	12.885.302	41	200
3	13.885.302	52	200
4	14.885.302	63	100
5	15.885.302	74	100
6	16.885.302	85	100
7	17.885.302	96	100
8	18.885.302	107	50
10	20.885.302	129	50
12	22.885.302	151	50

further number of poles on request

General Information

Pitch	11 mm
No. of poles	1 - 16

Technical Data

Rated Insulation Voltage	450 V acc. to EN 60998-1
Rated Current	10 A with receptable 6,3; wire 1,5 mm ² 16 A with receptable 6,3; wire 2,5 mm ² 20 A with receptable 6,3; wire 4 mm ² 25 A with receptable 6,3; wire 6 mm ²

Material

Moulding	PA, natural, V-2
Comparative Tracking Index	CTI 250
Insulating Group	IIIa
Temperature Range	RTI Str 90°C
Tab	Zinc plated steel

Approvals

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	20	300	B	14 - 12	1,7
	10	300	D	14 - 12	1,7
	Current [A]	Voltage [V]	[mm ²]		
	17,5	450	1,5		

Options / Accessories

- Consecutive numbering
- Special marking according to drawing
- Fixed marking in the tool on request