

GKS-112 305 064 A 1502 M

in product series GKS-112 M

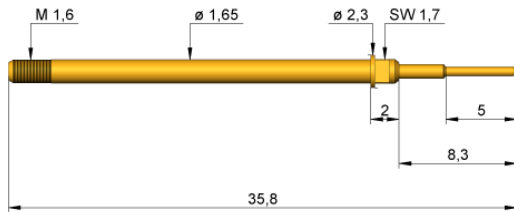


Image similar

Tip style



Image similar

General data

Order designation	GKS-112 305 064 A 1502 M
Variant number	GKS-112-0310
Sub product group	Screw-in test probes
Series	GKS-112 M Screwable
Type of installation	screw-in
Quick-exchange system	yes
Installation height adjustable	no
Non-rotating	no
Magnetic	yes
screw-in torque	3 - 5 Ncm

Mechanical data

Grid	2.54 mm
Total length	35.8 mm
Collar height	02
Probe barrel diameter	1.65 mm
Installation height without receptacle	10.3 mm
Working stroke	4 mm
Max. stroke	8 mm
Spring force at working stroke	1.5 N

Electrical data

Current load capacity / rated current	8 A
Resistance (Ri typical)	20 mOhm

Plunger head data

Tip style	05 bullet-nosed
Tip style diameter	0.64 mm
Tip style material	3 BeCu
Tip style surface	A Gold

Operating temperature range

Temperature min.	- 40 °C
Temperature max.	+ 80 °C