

# GKS-912 306 200 R 3002

in product series GKS-912

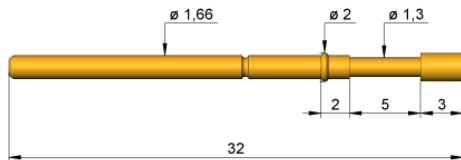


Image similar

## Tip style



Image similar

### General data

Order designation	GKS-912 306 200 R 3002
Variant number	GKS-912-0614
Sub product group	Metric Standard
Series	GKS-912
Type of installation	plug-in
Quick-exchange system	yes
Installation height adjustable	no
Non-rotating	no
Magnetic	yes

### Mechanical data

Grid	2.54 mm
Total length	32 mm
Collar height	02
Probe barrel diameter	1.66 mm
Installation height without receptacle	10 mm
Working stroke	4 mm
Max. stroke	5 mm
Spring force at working stroke	3 N

### Electrical data

Current load capacity / rated current	8 A
Resistance (Ri typical)	20 mOhm

### Plunger head data

Tip style	06 serrated
Tip style diameter	2.00 mm
Tip style material	3 BeCu
Tip style surface	R Rhodium

### Operating temperature range

Temperature min.	- 40 °C
Temperature max.	+ 80 °C