

GKS-912 305 140 A 1510

in product series GKS-912

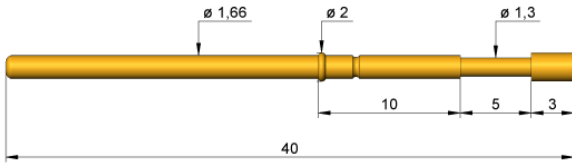


Image similar

Tip style



Image similar

General data

| | |
|--------------------------------|------------------------|
| Order designation | GKS-912 305 140 A 1510 |
| Variant number | GKS-912-1160 |
| Sub product group | Metric Standard |
| Series | GKS-912 |
| Type of installation | plug-in |
| Quick-exchange system | yes |
| Installation height adjustable | no |
| Non-rotating | no |
| Magnetic | yes |

Mechanical data

| | |
|--|---------|
| Grid | 2.54 mm |
| Total length | 40 mm |
| Collar height | 10 |
| Probe barrel diameter | 1.66 mm |
| Installation height without receptacle | 18 mm |
| Working stroke | 4 mm |
| Max. stroke | 5 mm |
| Spring force at working stroke | 1.5 N |

Electrical data

| | |
|---------------------------------------|---------|
| Current load capacity / rated current | 8 A |
| Resistance (Ri typical) | 20 mOhm |

Plunger head data

| | |
|--------------------|-----------------|
| Tip style | 05 bullet-nosed |
| Tip style diameter | 1.40 mm |
| Tip style material | 3 BeCu |
| Tip style surface | A Gold |

Operating temperature range

| | |
|------------------|---------|
| Temperature min. | - 40 °C |
| Temperature max. | + 80 °C |