

HSS-150 306 400 A 3002 M

in product series HSS-150 M

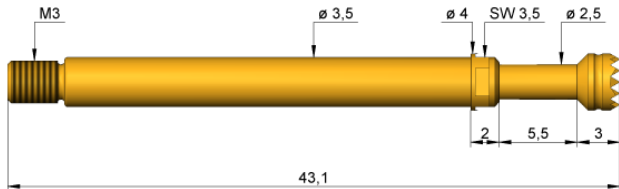


Image similar

Tip style



Image similar

General data

Order designation	HSS-150 306 400 A 3002 M
Variant number	HSS-150-0010
Sub product group	Standard high current test probes (screw-in)
Series	HSS-150 M screw-in
Type of installation	screw-in
Quick-exchange system	yes
Installation height adjustable	no
Non-rotating	no
Magnetic	yes
screw-in torque	10 - 20 Ncm

Mechanical data

Grid	4.5 mm
Total length	43.1 mm
Collar height	02
Probe barrel diameter	3.5 mm
Installation height without receptacle	10.5 mm
Working stroke	4.4 mm
Max. stroke	5.5 mm
Spring force at working stroke	3 N

Electrical data

Current load capacity / rated current	50 A
Resistance (Ri typical)	10 mOhm

Plunger head data

Tip style	06 serrated
Tip style diameter	4.00 mm
Tip style material	3 BeCu
Tip style surface	A Gold

Operating temperature range

Temperature min.	- 100 °C
Temperature max.	+ 200 °C