

# HSS-150 306 400 A 5002

in product series HSS-150

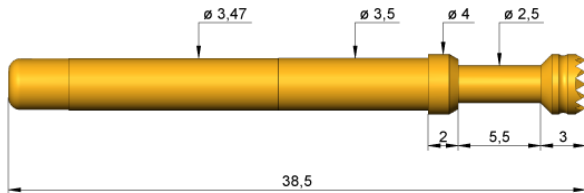


Image similar

## Tip style



Image similar

### General data

Order designation	HSS-150 306 400 A 5002
Variant number	HSS-150-0002
Sub product group	Standard high current test probes (press-in)
Series	HSS-150
Type of installation	plug-in
Quick-exchange system	yes
Installation height adjustable	no
Non-rotating	no
Magnetic	yes

### Mechanical data

Grid	4.5 mm
Total length	38.5 mm
Collar height	02
Probe barrel diameter	3.5 mm
Installation height without receptacle	10.5 mm
Working stroke	4.4 mm
Max. stroke	5.5 mm
Spring force at working stroke	5 N

### Electrical data

Current load capacity / rated current	50 A
Resistance (Ri typical)	10 mOhm

### Plunger head data

Tip style	06 serrated
Tip style diameter	4.00 mm
Tip style material	3 BeCu
Tip style surface	A Gold

### Operating temperature range

Temperature min.	- 100 °C
Temperature max.	+ 200 °C