
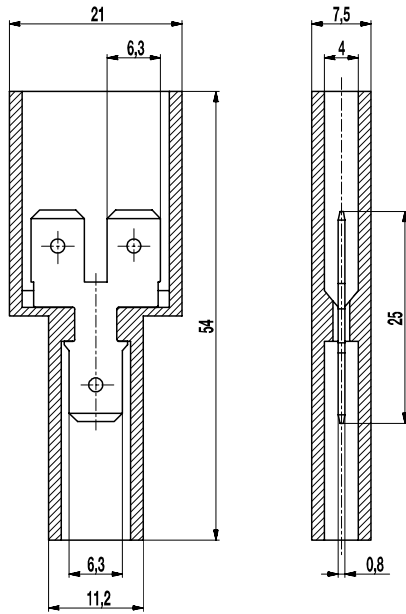


406

Tab connector
Lead distributor



Tab connector 406 is only available as 1-pole variant. It features one single connection 6,3 mm on one side and a double connection 2x6,3 mm on the opposite side.
Pushed on tab receptacles 6,3 are completely covered by the housing.

Part Numbers

No. of poles	406	Length	PU
1	10.836.008	54	250

General Information

No. of poles	1
--------------	---

Technical Data

Overvoltage Category	III
Pollution Severity Level	3
Rated Voltage	630 V
Rated Impulse Voltage	6 kV
Rated Insulation Voltage	750 V acc. to EN 60998-1
Rated Current	20 A: with receptacle 6,3; wire 6,0 mm ² (10 AWG)
Other specifications	Rated values apply to use without insulated underlay

Material

Moulding	Soft PVC, transparent, V-2
Comparative Tracking Index	CTI 400
Insulating Group	II
Temperature Range	-10°C up to 70°C
Tab	Nickel plated brass

Options / Accessories

- Special marking according to drawing