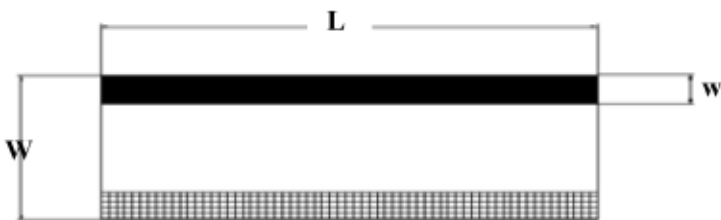


Diagram:**Specifications:**

- Product name: velcro fire-retardant wrap
- Material: fiberglass + silicone
- Color: Red
- Working temperature: $-70^{\circ}\text{C} \sim +260^{\circ}\text{C}$ under normal use
- Average voltage to insulation damage in the normal state: 10.0 kv
- Advantage: flame-retardant, heat resistance, thermal insulation, anti-electronic, flexible performances.
- Application: mostly used in the electronic, chemical, metallurgical, vessel, machanical manufacturing and other fields with high temperature.

No.	Modification content	Reviser	Date

Part No.	I.D.of the product to be covered	Weight (g/m)	Velcro width (w)	Product thickness	Total width (W)	Packing (L/m)
VGWG-015	15mm	0.26kg	$15 \pm 1\text{mm}$	$2.0 \pm 0.5\text{mm}$	$80 \pm 5\text{mm}$	20m
VGWG-020	20mm	0.30kg	$15 \pm 1\text{mm}$	$2.3 \pm 0.5\text{mm}$	$105 \pm 5\text{mm}$	20m
VGWG-025	25mm	0.40kg	$15 \pm 1\text{mm}$	$2.8 \pm 0.5\text{mm}$	$115 \pm 5\text{mm}$	20m
VGWG-030	30mm	0.50kg	$20 \pm 1\text{mm}$	$3.0 \pm 0.5\text{mm}$	$130 \pm 5\text{mm}$	10m
VGWG-040	40mm	0.75kg	$20 \pm 1\text{mm}$	$3.5 \pm 0.5\text{mm}$	$172 \pm 5\text{mm}$	10m
VGWG-050	50mm	0.95kg	$20 \pm 1\text{mm}$	$4.5 \pm 0.5\text{mm}$	$200 \pm 5\text{mm}$	10m