

**3M** Science.  
Applied to Life.™



Mil Spec MIL-STD-2041E  
Compliant

# Our best performing duct tape under the sun.

3M™ Performance Plus Duct Tape 8979/8979N



Clean  
Removal



Outdoor  
Exposure



Lasts up to  
1 Year




Water-  
resistant

# 3M™ Performance Plus Duct Tape 8979/8979N takes high performance outdoors into the sun and cleanly off the surface.

- Removes cleanly for up to six months from most opaque surfaces even after exposure to sunlight and temperature extremes
- Stays on for up to one year without deterioration even outdoors
- Aggressive adhesive for quick and reliable attachment
- High tensile strength for demanding applications
- Strong water-resistant backing resists wear, abrasion, moisture and weathering
- Easy to tear straight across and down without curling for ease of application
- Saves time of removing sticky residue
- 8979N meets Military Compliance MIL-STD-2041E




Masking Access Holes



Outdoor Holding



Hanging Poly

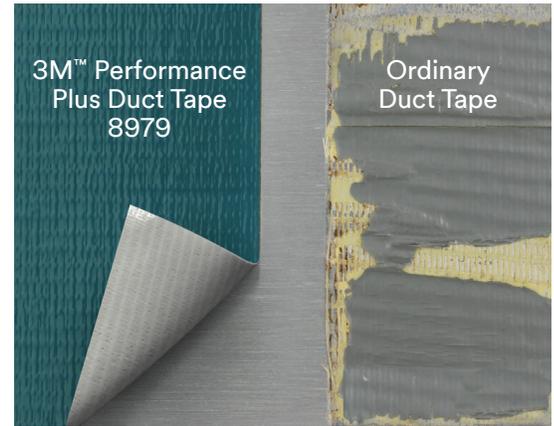

**3M™ Performance Plus Duct Tape 8979 holds up to weathering exposure and removes cleanly.**



Product	3M UPC	Size	Color	Rolls/Cs
<b>8979</b>	048011-53922-5	24mm x 54.8m	● Slate Blue	48
	● 021200-56468-0	48mm x 54.8m		24
	021200-56469-7	72mm x 54.8m		12
	021200-56470-3	96mm x 54.8m		12
	048011-58183-5	144mm x 54.8m		6
	048011-58120-1	12" x 60 yds		2
	● 048011-53851-8	48mm x 22.8m	12	
	● 048011-53916-4	48mm x 54.8m	● Olive	24
● 048011-53918-8	48mm x 54.8m	● Black	24	
<b>Nuclear Grade</b>				
<b>8979N</b>	048011-58130-9	24mm x 54.8m	● Red	48
	048011-53914-0	48mm x 54.8m		24
	048011-53915-7	72mm x 54.8m		12
	021200-74327-6	48mm x 54.8m	● Slate Blue	24
	021200-74328-3	72mm x 54.8m		12
	048011-58185-9	144mm x 54.8m		6

● = Each roll is individually wrapped and marked with UPC Number.

Typical Physical Properties	
Adhesion to Steel	57 oz/in (6.2 N/cm)
Tensile Strength	36 lbs/in (63 N/cm)
Elongation at Break	17%
Tape Thickness	11.5 mil (0.29mm)
Temp Use Range	Up to 200°F (93°C)
Application Temperature	40–120°F (4–49°C)
Clean Removal Outdoors	Up to 6 months
Leachable Halogens (Cl, FL, Br)	8979N: <30 ppm total
Leachable Sulfur	8979N: <50 ppm
Backing	Polyethylene film over cloth scrim
Adhesive	Natural and synthetic rubber
References	8979: UL723/ASTM E84 8979N: ASME NQA-1, MIL-STD-2041E

Note: Data should be considered representative or typical only, and should not be used for specification purposes.



**3M Closure and Masking Systems Division**  
3M Center, Building 225-3S-06  
St. Paul, MN 55144-1000  
800-362-3550 877-369-2923 (Fax)

**Warranty and Limited Remedy:** 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except for the limited remedy above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal or equitable theory asserted.

3M is a trademark of 3M. © 3M 2019. All rights reserved. Please recycle. 70-0709-5387-5 Rev10/19