

# iC-TL85 TO46-2F1

Infrared LED



Rev A1, Page 1/4

## FEATURES

- ◆ Emission peak at 850 nm matched to silicon sensors
- ◆ Temperature range -40 to 125 °C
- ◆ High optical output power
- ◆ Fast switching speed
- ◆ TO-46 package with flat window for high reliability
- ◆ Short TO-cap
- ◆ ROHS compliant

## APPLICATIONS





- ◆ Illumination for high resolution optical encoder
- ◆ Modulated light barriers

## PACKAGES



TO46-2F1

## DIMENSIONS

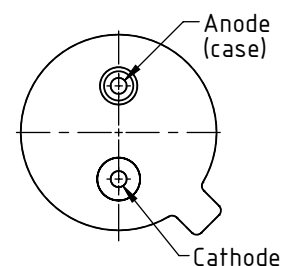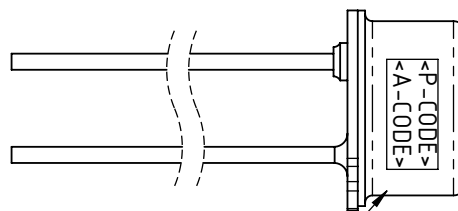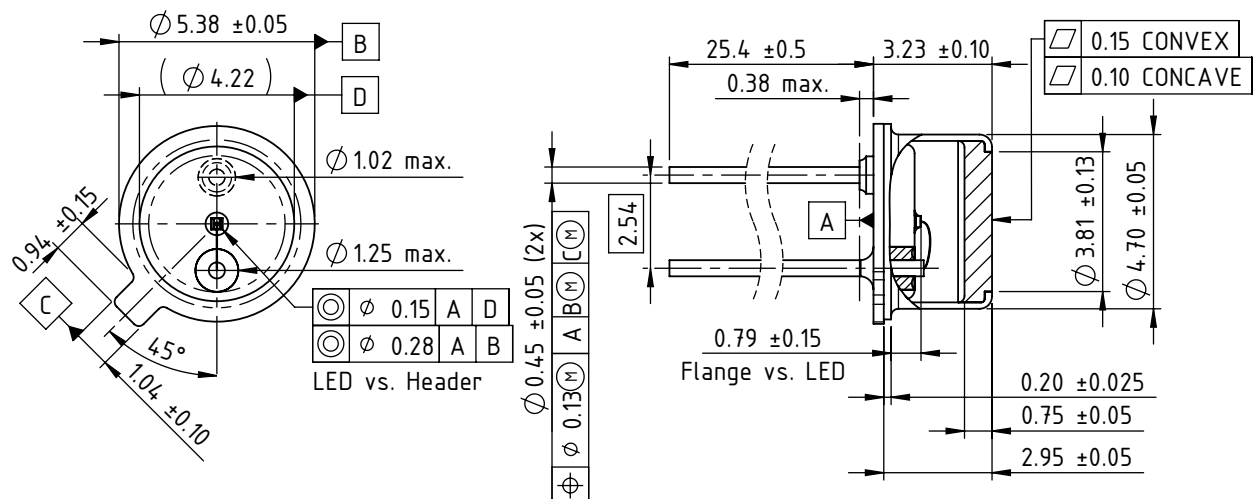

Marking (orientation subject to change)

drf\_to46-2f1\_tl85\_z\_pack\_1\_5:1

# iC-TL85 TO46-2F1

## Infrared LED



Rev A1, Page 2/4

### ABSOLUTE MAXIMUM RATINGS

Beyond these values damage may occur (Ta = 25°C, unless otherwise noted)

Item No.	Symbol	Parameter	Conditions			Unit
				Min.	Max.	
G001	IF	Forward current (DC)			100	mA
G002	IFSM	Surge forward current	tp ≤ 10μs, 5 % duty cycle		1000	mA
G003	VR	Reverse voltage			5	V
G004	P	Power dissipation			150	mW
G005	Tj	Junction temperature		-40	125	°C

### THERMAL DATA

Item No.	Symbol	Parameter	Conditions				Unit
				Min.	Typ.	Max.	
T01	Ta	Operating Ambient Temperature Range		-40		125	°C
T02	Ts	Storage Temperature Range		-40		125	°C
T03	Tpk	Soldering Temperature	tpk < 5 s, 3 mm from case			260	°C
T04	Rthja	Thermal Resistance Junction To Ambient			350		K/W

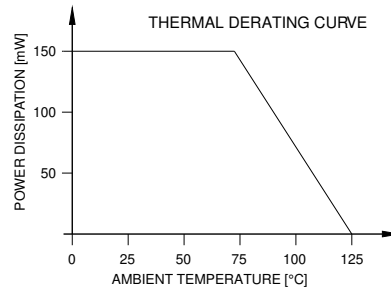


Figure 1: Maximum power dissipation with respect to temperature

### ELECTRICAL CHARACTERISTICS

Tamb = 25°C, unless otherwise noted

Item No.	Symbol	Parameter	Conditions				Unit
				Min.	Typ.	Max.	
<b>Electrical and Optical Characteristics</b>							
001	VF	Forward voltage	IF = 20 mA		1.4	1.8	
002	VR	Reverse voltage	IR = 5 μA	5			V
003	φe	Radiant power	IF = 20 mA*1)measured with iC-Haus equipment	2.2	4.5		mW
004	TK(φe)	Temperature coefficient of radiant power	IF = 20 mA, Tj = 25°C...125°C		-0.6		%/K
005	λp	Peak wavelength	IF = 20 mA	840	850	860	nm
006	Δλ	Spectral half width	IF = 20 mA		30		nm
008	tr, tf	Switching time	IF = 100 mA, RL = 50 Ω		12		ns

\*1) Measured with a PD 0.7 x 0.7 mm<sup>2</sup> located 6.5 mm from LED emitting area and converted into a light level based on a golden device.

# iC-TL85 TO46-2F1

## Infrared LED



Rev A1, Page 3/4

### SAFETY ADVICES

Depending on the mode of operation, these devices emit highly concentrated non visible infrared light which can be hazardous to the human eye.

Products which incorporate these devices have to follow the safety precautions given in IEC 60825-1 and IEC 62471.

### HANDLING ADVICES

Because of the specific housing materials and geometries used, these LED devices are sensitive to rough handling or assembly and can thus be easily damaged

or may fail in regard to their electro-optical operation. Excessive mechanical stress or load on the glass surface or to the sealed cap must be avoided.

### DESIGN REVIEW: Notes on chip characteristics

iC-TL85z		
No.	Function, Parameter/Code	Description and Application Hints
1	initial chip release	see datasheet revision A1

Table 4: Notes on chip functions regarding iC-TL85z

iC-Haus expressly reserves the right to change its products and/or specifications. An info letter gives details as to any amendments and additions made to the relevant current specifications on our internet website [www.ichaus.com/infoletter](http://www.ichaus.com/infoletter); this letter is generated automatically and shall be sent to registered users by email.

Copying – even as an excerpt – is only permitted with iC-Haus' approval in writing and precise reference to source.

iC-Haus does not warrant the accuracy, completeness or timeliness of the specification and does not assume liability for any errors or omissions in these materials.

The data specified is intended solely for the purpose of product description. No representations or warranties, either express or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given. In particular, this also applies to the stated possible applications or areas of applications of the product.

iC-Haus products are not designed for and must not be used in connection with any applications where the failure of such products would reasonably be expected to result in significant personal injury or death (*Safety-Critical Applications*) without iC-Haus' specific written consent. Safety-Critical Applications include, without limitation, life support devices and systems. iC-Haus products are not designed nor intended for use in military or aerospace applications or environments or in automotive applications unless specifically designated for such use by iC-Haus.

iC-Haus conveys no patent, copyright, mask work right or other trade mark right to this product. iC-Haus assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

# iC-TL85 TO46-2F1

Infrared LED



Rev A1, Page 4/4

## ORDERING INFORMATION

Type	Package	Options	Order Designation
iC-TL85	TO46-2F1 RoHS compliant		iC-TL85 TO46-2F1

For technical support, information about prices and terms of delivery please contact:

**iC-Haus GmbH**  
Am Kuemmerling 18  
D-55294 Bodenheim  
GERMANY

**Tel.: +49 (0) 61 35 - 92 92 - 0**  
**Fax: +49 (0) 61 35 - 92 92 - 192**  
**Web: <http://www.ichaus.com>**  
**E-Mail: [sales@ichaus.com](mailto:sales@ichaus.com)**

**Appointed local distributors: [http://www.ichaus.com/sales\\_partners](http://www.ichaus.com/sales_partners)**