

Circuit Breaker for Equipment thermal, Threaded neck type, Reset type, Quick connect terminals



See below:

### Approvals and Compliances

#### Description

- Threaded neck type
- Thermal circuit breaker
- 1-pole
- Reset type
- Quick connect terminals 6.3 x 0.8 mm

#### Unique Selling Proposition

- Compact design
- Positively trip-free release
- Available with cover
- Different mounting possibilities

#### Applications

- Power tools
- Household Equipment
- Power supplies and chargers
- Industrial appliances

#### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Product News](#)

#### Technical Data

|                                                    |                                                                                                                          |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Rated Voltage AC                                   | AC 240 VAC                                                                                                               |
| Rated Voltage DC                                   | 48 VDC                                                                                                                   |
| Rated current range AC                             | 0.05 - 16 A                                                                                                              |
| Conditional short circuit capacity I <sub>nc</sub> | IEC 60934: PC1, AC 240 V: 2 kA                                                                                           |
| Short circuit capacity I <sub>cn</sub>             | IEC 60934: at I <sub>n</sub> < 6.5 A/240 VAC : 8 x I <sub>n</sub><br>IEC 60934: at I <sub>n</sub> ≥ 6.5 A/240 VAC : 96 A |
| Degree of Protection                               | front side IP40 acc. to IEC 60529                                                                                        |
| Dielectric Strength                                | 50Hz: > 1.5 kV<br>Impulse 1.2/50 μs: > 2.5 kV                                                                            |
| Insulation Resistance                              | 500VDC > 100 MΩ                                                                                                          |
| Endurance typical                                  | 2 x I <sub>r</sub> : 500 switching cycles                                                                                |
| Endurance minimum                                  | Reset type<br>AC : 2 x I <sub>r</sub> , cos φ 0.6 :<br>DC : 2 x I <sub>r</sub> , L/R = 2 - 3 ms :<br>50 switching cycles |

|                           |                                                                                                                          |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Overload                  | IEC: min. 40 trips<br>@ 6 x I <sub>r</sub> , cos φ 0.6<br>UL / CSA: min. 50 trips<br>@ 1.5 x I <sub>r</sub> , cos φ 0.75 |
| Allowable Operation Temp. | -5 °C to 60 °C                                                                                                           |
| Vibration Resistance      | ± 1.5 mm @ 10 - 60 Hz<br>acc. to IEC 60068-2-6, test Fc<br>5 G @ 60 - 500 Hz<br>acc. to IEC 60068-2-6, test Fc           |
| Shock Resistance          | 100 G / 6ms<br>acc. to IEC 60068-2-27, test Ea                                                                           |
| Tripping Type             | Thermal                                                                                                                  |
| Actuation Type            | Reset type                                                                                                               |
| Weight                    | ca. 10 g                                                                                                                 |

#### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: T11

| Approval Logo                                                                    | Certificates                  | Certification Body | Description                              |
|----------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | VDE Certificate Number: 99759            |
|  | <a href="#">UL Approvals</a>  | UL                 | UR File Number: E71572                   |
|  | <a href="#">CCC Approvals</a> | CCC                | CCC Certificate Number: 2024010307710413 |

## Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard          | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60934         | Circuit-breakers for equipment (CBE)                                  |
|  | Designed according to | UL 1077           | Standard for Supplementary Protectors for Use in Electrical Equipment |
|  | Designed according to | CSA C22.2 No. 235 | Supplementary Protectors                                              |
|  | Designed according to | GB 17701          | Circuit-breaker for equipment                                         |

## Application standards

Application standards where the product can be used

| Organization                                                                      | Design                         | Standard       | Description                                                                                   |
|-----------------------------------------------------------------------------------|--------------------------------|----------------|-----------------------------------------------------------------------------------------------|
|  | Suitable for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |


## Compliances

The product complies with following Guide Lines

| Identification                                                                     | Details                                        | Initiator   | Description                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a>   | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | <a href="#">UKCA declaration of conformity</a> | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.                                                  |
|  | <a href="#">RoHS</a>                           | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|  | <a href="#">China RoHS</a>                     | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | <a href="#">REACH</a>                          | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |


Dimension [mm]

T11-211  $\leq 7,5A$


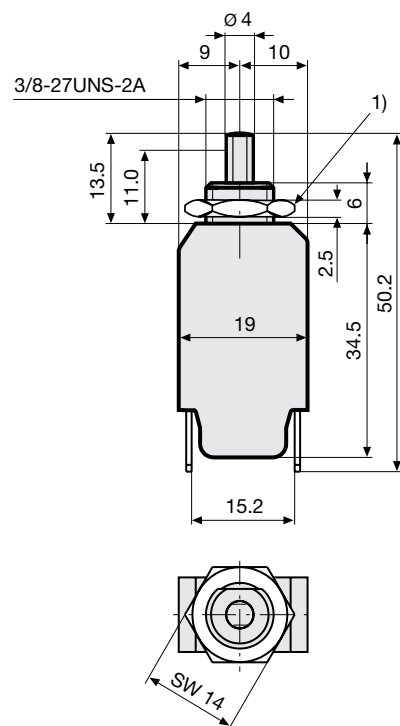


1) max. torque 0.6Nm

T11-211  $> 7,5A$

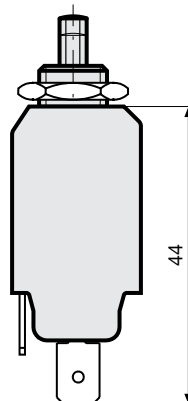


T11-211N

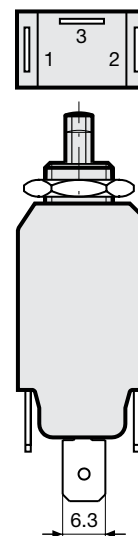


Diagrams


Rated current  $\leq 7,5$  A



Rated current  $> 7,5$  A



Shunt terminal T11-...N  $\leq 6,5$  A



Typical internal resistance per pole

| Rated Current [A] | Internal Resistance [ $\Omega$ ] |
|-------------------|----------------------------------|
| 0.05              | 380.000                          |
| 0.50              | 5.200                            |
| 1.00              | 1.350                            |
| 2.00              | 0.300                            |
| 3.00              | 0.130                            |
| 4.00              | 0.080                            |
| 5.00              | 0.040                            |
| 6.00              | 0.040                            |
| 7.00              | 0.020                            |
| 8.00              | 0.012                            |
| 9.00              | 0.012                            |
| 10.00             | 0.011                            |
| 11.00             | 0.0095                           |
| 12.00             | 0.0095                           |
| 13.00             | 0.0085                           |
| 14.00             | 0.0085                           |
| 15.00             | 0.0075                           |
| 16.00             | 0.0075                           |


## Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

| Ambient Temperature [°C] | Correction factor |
|--------------------------|-------------------|
| -5                       | 0.87              |
| 0                        | 0.90              |
| +10                      | 0.95              |
| +23                      | 1.00              |
| +30                      | 1.04              |
| +40                      | 1.10              |
| +50                      | 1.15              |
| +60                      | 1.20              |

Example: Rated current = 5 A, Environmental temperature = 40 °C, --> Correction factor = 1.1, Resulting current = 5.5 A --> Round to next higher rated current: 6 A

## Time-Current-Curves

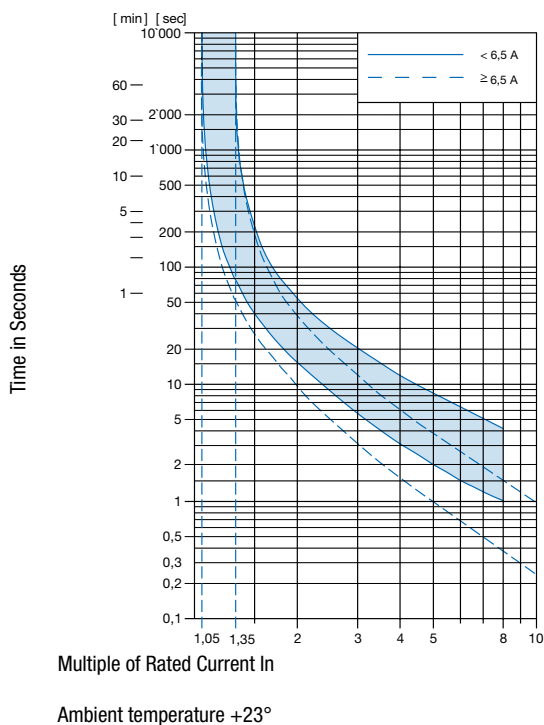

## Config. Code

T11 - 1 2 3 A B - 1.23

The characters are placeholders for the correspondingly keys of selections from the key tables.

T11 - **1** 2 3 A B - 1.23 = Mounting

| Mounting                | Configuration key |
|-------------------------|-------------------|
| Threaded neck type 6 mm | 2                 |

T11 - 1 **2** 3 A B - 1.23 = Actuation Type

| Actuation Type | Configuration key |
|----------------|-------------------|
| Reset type     | 1                 |

T11 - 1 2 **3** A B - 1.23 = Terminal

| Terminal                         | Configuration key |
|----------------------------------|-------------------|
| Quick connect terminal 6.3x0.8mm | 1                 |

T11 - 1 2 3 **A** B - 1.23 = Shunt terminal

| Shunt terminal | Configuration key |
|----------------|-------------------|
| Shunt terminal | N                 |

T11 - 1 2 3 A **B** - 1.23 = Setting indication

Setting indication

Setting indication

T11 - 1 2 3 A B - 1.23 = Rated current

Configuration key

R

Rated current

Other rated currents on request

Configuration key

Variants

| Rated current | Construction variants |                    | Config. Code | Order Number |
|---------------|-----------------------|--------------------|--------------|--------------|
|               | Shunt terminal        | Setting indication |              |              |
| 0.8 A         |                       |                    | T11-211-0.8  | 4400.0042    |
| 1.0           |                       |                    | T11-211-1    | 4400.0008    |
| 1.5 A         |                       |                    | T11-211-1.5  | 4400.0056    |
| 3.0 A         |                       |                    | T11-211-3    | 4400.0010    |
| 4.0 A         |                       |                    | T11-211-4    | 4400.0001    |
| 8.0 A         |                       |                    | T11-211-8    | 4400.0015    |
| 10.0 A        |                       |                    | T11-211-10   | 4400.0003    |
| 12.0 A        |                       |                    | T11-211-12   | 4400.0052    |
| 15.0 A        |                       |                    | T11-211-15   | 4400.0065    |
| 16.0 A        |                       |                    | T11-211-16   | 4400.0017    |

Availability for all products can be searched real-time: <https://www.schurter.com/en/info-center/support-tools/stock-check-distributors>

Packaging Unit

100 Pcs

Accessories

Description



T-Line\_Accessories

Accessories to T-Line