



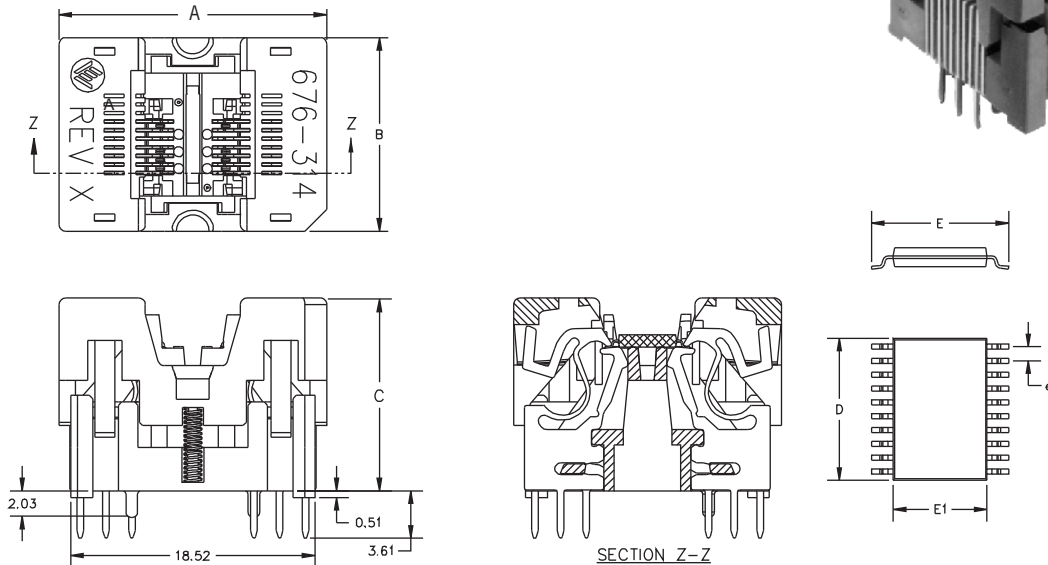


676 SERIES TSSOP DUAL PINCH ZIF

- Open top, zero insertion force design for automatic loading
- Dual pinch, highly reliable contacts
- Live bug insertion
- Thru hole design

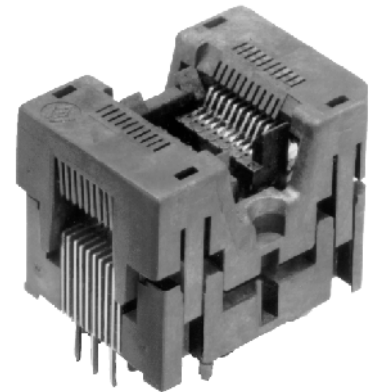

DESCRIPTION & ORDERING INFORMATION

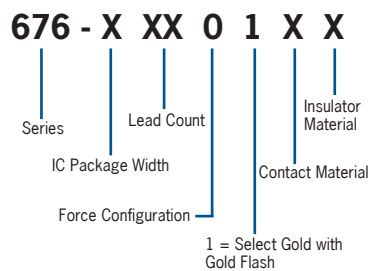

MATERIALS & SPECIFICATIONS

- Socket Body: PEI or Equivalent
- Contact: Beryllium Copper Alloy
- Contact Plating: Gold over Nickel
- Contact Normal Force: 30 grams
- Contact Resistance: 30 mΩ
- Dielectric: 600V AC for 2 minute
- Temperature Rating: 150°C
- Insulation Resistance: 12,000 MΩ @ 100V DC
- Durability: 10,000 cycles min.

Lead Count	Pitch e (mm)	Package Dimensions (mm)			Part Number	Socket Dimensions (mm)		
		Width (E1)	Tip to Tip (E)	Length (D)		Length (A)	Width (B)	Height (C)
14	0.65	4.39	6.40	5.15	676-3140111	20.32	14.70	14.63
16	0.65	4.39	6.40	5.00	676-3160111	20.32	14.70	14.63
20	0.65	4.39	6.40	6.65	676-3200111	20.32	14.70	14.63
2 X 8 LD	0.65	4.39	6.40		676-3200111-004	20.32	14.70	14.63