

Audio Connector, Socket, 6.3 mm, 3-pole, solder terminal, shielded



### Description

- Solder terminal:  
Screw-on mounting, from rear-side
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 3-pole, shielded, straight

### Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data


Diameter	6.3 mm
Number of Poles	3-pole
Ratings DC	1 A / 30VDC
Ratings AC	1 A / 30VAC
Dielectric Strength	500VDC
Insulation Resistance	> 50 MΩ @ 500VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal silver plated
Mounting	Screw-on mounting wall thickness max. 4.0mm
Housing	screened
Style	straight
Lifetime	5000 Insertions

### Dimensions

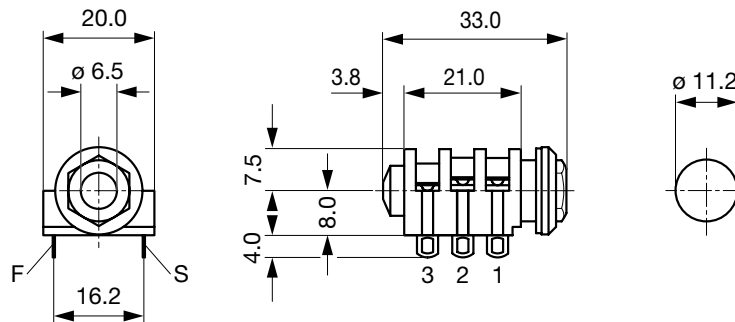

### Diagrams



### Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/Sockets	6.3	3-pole	solder terminal	4833.2300

**Packaging unit** 100 Pcs

---

### Mating Inlets/Plugs

#### Category / Description

[Audio Plug/Sockets Overview complete](#)



Audio Connector, Plug, 6.3 mm, 3-pole, solder terminal, shielded	4833.1300
Audio Connector, Plug, 6.3 mm, 3-pole, solder terminal, insulated	4833.1310
Audio Connector, Plug, 6.3 mm, 3-pole, solder terminal, insulated, angled	4833.1320

[Audio Plug/Sockets further types to 4833 Audio-Stecker, D=6,3mm](#)

---