

A6030

60x60x30mm
(2.36"x2.36"x1.18")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
MOTOR TYPE	Shaded Pole Motor
TERMINATION	Lead wire
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230 V Type
	1,500 VAC for 1 minute
DIELECTRIC STRENGTH	Class A
INSULATION	10M Ohms min. @ 500VDC
INSULATION RESISTANCE	-10°C to +70°C
OPERATING TEMPERATURE	Impedance Protected
SAFETY	140g
WEIGHT	Yes
ROHS COMPLIANCE	

60mm

60mm

AC Fans & Blowers

DIMENSION

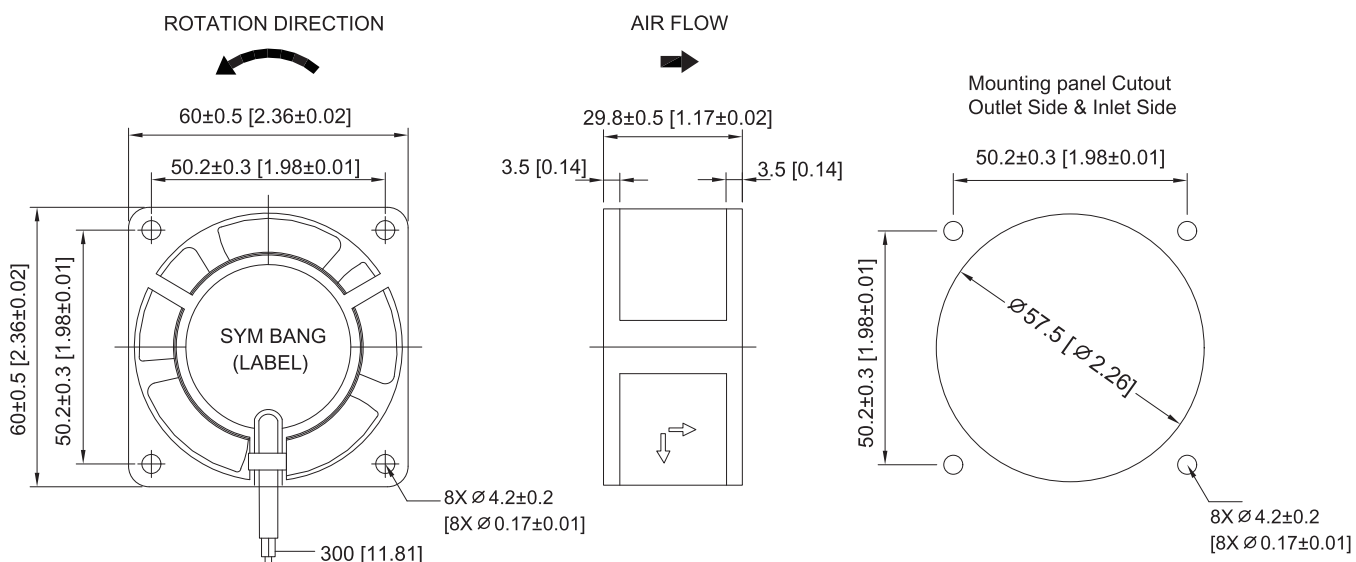

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
A6030V1HBL	115	50/60	0.04/0.03	5/4	2400/3000	0.07/0.07 1.7/1.7	8.1/9.1 0.23/0.26	27/28
A6030V2HBL	230	50/60	0.02/0.01	5/4	2400/3000	0.07/0.07 1.7/1.7	8.1/9.1 0.23/0.26	27/28

AIR PERFORMANCE

