

A 9238-S



92x92x38mm
(3.62"x3.62"x1.5")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
MOTOR TYPE	Shaded Pole Motor
TERMINATION	Terminals or Lead Wire
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 120 V Type 185 VAC to 245 VAC for 230 V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10M Ohms min. @ 500 VDC
OPERATING TEMPERATURE	-10°C to +70°C
SAFETY	Impedance Protected
WEIGHT	450g
ROHS COMPLIANCE	YES
ADDITIONAL FUNCTION	FG, RD

92mm

92mm

AC Fans & Blowers

DIMENSION

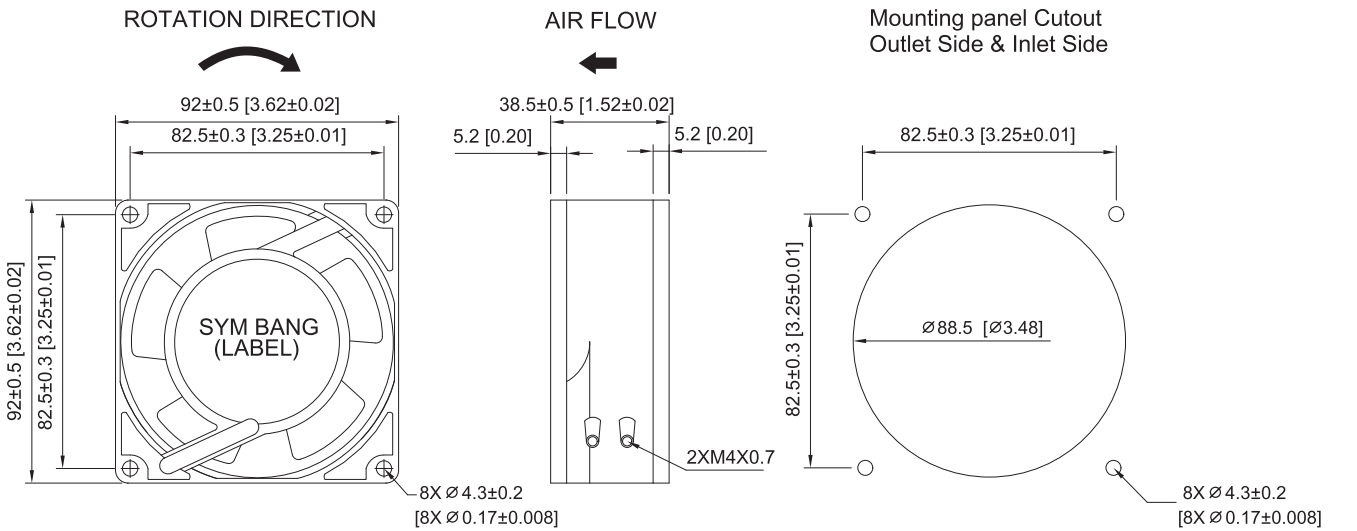

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A9238V1H-S	115	50/60	0.15/0.13	12.8/11.3	2700/3200	0.16/0.22	4.3/5.5	42/50	1.19/1.42	32
A9238V1M-S	115	50/60	0.07/0.06	5.8/ 5.6	2400/2550	0.09/0.10	2.3/2.7	28/32	0.79/0.91	23
A9238V1L-S	230	50/60	0.05/0.05	4.4/ 4.3	2200/1950	0.07/0.06	2.0/1.6	25/21	0.71/0.59	19
A9238V2H-S	230	50/60	0.07/0.06	12.7/11.1	2600/3050	0.16/0.22	4.3/5.5	42/50	1.19/1.42	32
A9238V2M-S	230	50/60	0.04/0.04	6.8/ 6.4	2400/2550	0.09/0.10	2.3/2.7	28/32	0.79/0.91	23

AIR PERFORMANCE

