
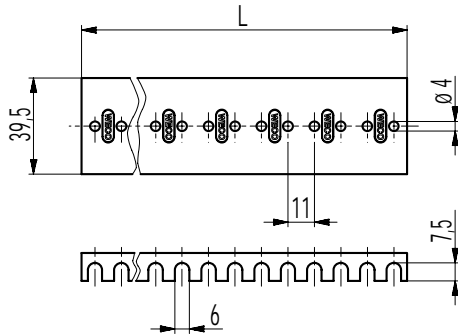


3070-B1/-B2

Cover cap
Accessories

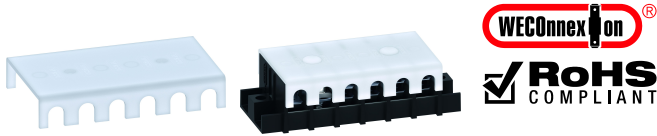

Caps 3070-B.. cover series 307/3070 connector blocks.
The tab receptacle crimping points protrude the housing by approx. 6 mm. When using our insulation sleeves, the cover caps completely insulate the connectors.
Depending on the number of poles, one or two BEF-3070 securing pins are required. After wiring, the pins are inserted through the mounting holes into the tubular rivets of the package. By pulling out the pins with a tool, the cap can be removed.

ORDERING NOTE:

- ..-B1 = 1 mounting holes
- ..-B2 = 2 mounting holes

Part Numbers

No. of poles	3070-B1	3070-B2	Length	PU
2	10.891.028	10.891.017	24,00	800
3	10.891.018	10.891.031	35,00	600
4		10.891.019	46,00	400
5		10.891.020	57,50	112
6		10.891.021	68,50	100
7		10.891.022	79,50	80
8		10.891.023	90,50	72
9		10.891.024	101,50	64
10		10.891.025	113,00	64
11		10.891.026	124,00	20
12		10.891.027	135,00	20

further number of poles on request

General Information

Pitch	11 mm
No. of poles	2 - 12
Usable with	connector blocks 307-PCF; 3070-PCM
Additional Information	For one-tier poles, securing pins BEF-3070-21 are available, for multi-tier poles securing pins BEF-3070-18 are provided.

Material

Moulding	PA, natural, V-2
Temperature Range	-40°C up to 100°C

Options / Accessories

- Securing pin BEF-3070