

Product Data Sheet

Zero8 socket low-profile shielded,
Part No. 406-52132-51






Illustration similar



Parallel

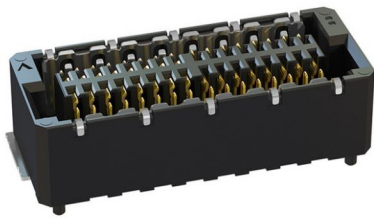

SMT



High Density



High Speed



Rugged



EMC

- 32 pins
- unmated stacking height: 4.85 mm
- EMC shielding
- SMT
- 0.8 mm pitch
- Performance level 1



» to product on www.ept.de



» to product group Zero8

Product Data Sheet

Zero8 socket low-profile shielded, Part No. 406-52132-51



Technical Specifications

Basics

Performance Level <i>IEC 60512-9-1:2010</i>	1
No. of Contacts	32
Termination Technology	SMT
Board-to-Board Distance	6.00 mm bis 9.00 mm
Operating Temperature Range	-55°C to + 125°C

Material

Insulator Material	LCP, UL 94 V-0
CTI value <i>IEC 60112</i>	150
Contact Material	Copper alloy
Plating	Au over Ni
Termination area	Sn over Ni

Mechanical

Pitch	0.8 mm
Mating Force per Pin	≤ 0.5 N
Separating Force per Pin	≤ 0.4 N
Durability <i>IEC 60512-9-1</i>	500 mating cycles
Coplanarity	≤ 0.1 mm
Vibration, sinusoidal <i>IEC 60512-6-4</i>	10 - 2000 Hz, 20g
Contact mating problems if vibrations occur, sinusoidal <i>IEC 60512-2-5</i>	≤ 1 μs
Shock, semi-sinusoidal <i>IEC 60512-6-3</i>	50g, 11 ms
Contact mating problems if shock occur, semi-sinusoidal <i>IEC 60512-2-5</i>	≤ 1 μs

Electrical

Operational Current <i>IEC 60512-5-2</i>	1.7 A at 20°C (52 pins)
Contact Resistance <i>IEC 60512-2-1</i>	≤ 20 mΩ
Clearance and Creepage	0.25 mm
Insulation Resistance <i>IEC 60512-3-1</i>	> 5 GΩ
Test Voltage <i>IEC 60512-4-1</i>	500 VAC
Data Transfer Rate	16 Gbps

Product Data Sheet

Zero8 socket low-profile shielded,
Part No. 406-52132-51



Technical Specifications

Processing

Soldering Temperature 20 - 40 s at 260°C
JEDEC J-STD-020E

MSL 1
JEDEC J-STD-020E

Assembly Pick and Place

Approval / Compliance

UL file E130314

Environment RoHS konform

Product Data Sheet

Zero8 socket low-profile shielded,
Part No. 406-52132-51



Modifications

Available on request

- different number of pins
- other performance level

Drawings

Component data in 2D and 3D format you can download here:

[» PDF](#)

[» 3D IGES](#)

[» 3D STEP](#)

[» 3D PDF](#)