


Audio Connector, Socket, 6.3 mm, 3-pole, solder terminals for PCB, shielded

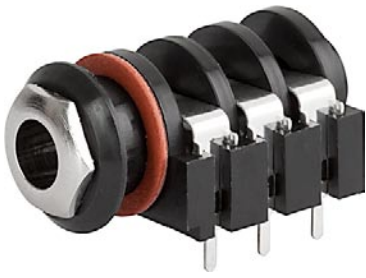

Description

- PCB Mounting:
 - Screw-on mounting, from rear-side
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 3-pole, shielded, straight

References

Alternative: Housing insulated [4833.2330](#)


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

Diameter	6.3 mm	Allowable Operation Temp.	-20 °C to 70 °C
Number of Poles	3-pole	Terminal	PCB terminals silver plated
Ratings DC	1 A / 30VDC	Mounting	Screw-on mounting wall thickness max. 4.0mm
Ratings AC	1 A / 30VAC	Housing	screened
Dielectric Strength	500VDC	Style	straight
Insulation Resistance	> 50 MΩ @ 500VDC	Lifetime	5000Insertions

Dimensions

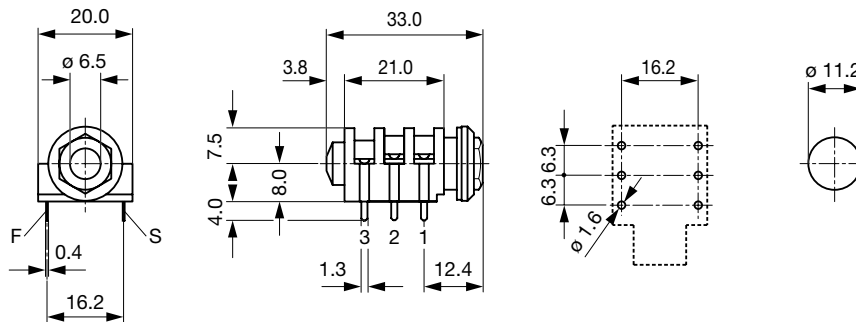

Diagrams



Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/Sockets	6.3	3-pole	PCB terminals	4833.2320

Packaging unit 100 Pcs

Mating Inlets/Plugs

Category / Description

[Audio Plug/Sockets Overview complete](#)



Audio Connector, Plug, 6.3 mm, 3-pole, solder terminal, shielded	4833.1300
Audio Connector, Plug, 6.3 mm, 3-pole, solder terminal, insulated	4833.1310
Audio Connector, Plug, 6.3 mm, 3-pole, solder terminal, insulated, angled	4833.1320

[Audio Plug/Sockets further types to 4833 Audio-Stecker, D=6,3mm](#)
